

Dimensions and Powers Table

Powers

SB series motors 2 Poli



SB series motors 6 Poli

SB series motors 4-2 Poli

SB series motors 4Poli

SB series motors 8Poli

SB series motors 6-4 Poli

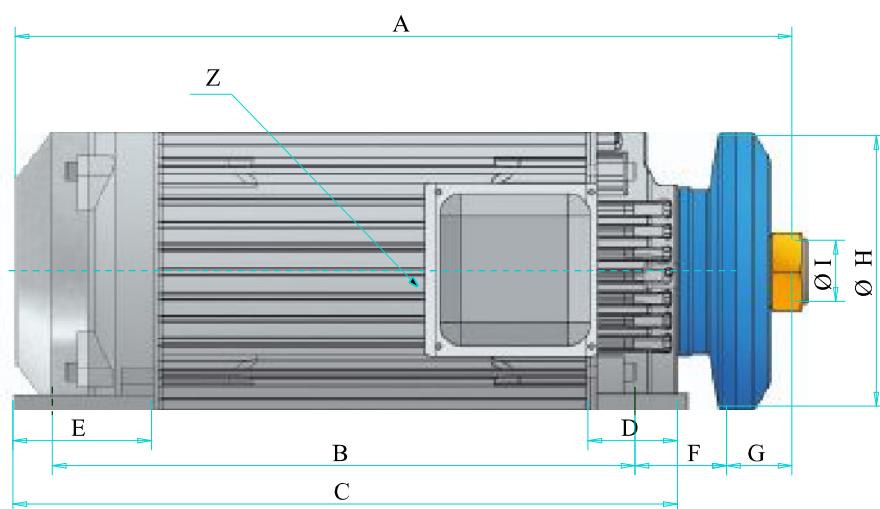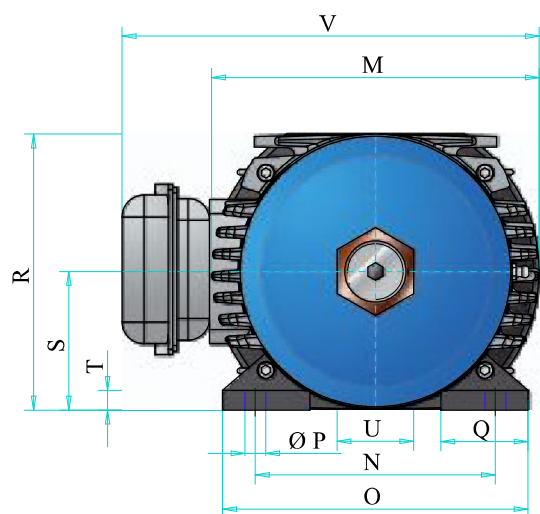

Tipo	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	T	U	V	Z
SB 76 A	436	335	366	49	104	50	48	151	30	17	181	130	172	14	50	150	76	12	46	225	PG 16
SB 76 B C	494	400	431	49	104	50	48	151	30	17	181	130	172	14	50	150	76	12	46	225	PG 16
SB 76 D E	554	460	491	49	104	50	48	151	30	17	181	130	172	14	50	150	76	12	46	225	PG 16
SB 93 A B	577	460	495	65	118	61	53	185	50	19	222	160	205	14	57	185	93	13	60	292	PG 21
SB 93 C	617	500	535	65	118	61	53	185	50	19	222	160	205	14	57	185	93	13	60	292	PG 21
SBC 107 A B C D E	665	525	563	67	114	67	57	213	50	16	260	180	224	15	62	213	107	15	60	325	PG 21
SBC 107-L A B C D	765	625	663	67	114	67	57	213	50	16	260	180	224	15	62	213	107	15	60	325	PG 21
SB 127 A B C D E	705	534	598	80	126	84	59	253	60	36	300	220	280	19	80	253	127	20	70	385	2 x PG 29
SB 127-L A B C D	829	654	718	80	126	84	59	253	60	25	300	220	280	19	80	253	127	20	80	385	2 x PG 29
SB 142 A B C D E	860	680	732	80	157	84	66	280	60	30	320	288	350	23	95	292	150	27	80	405	2 x PG 29
SB 160 A B C	1030	770	842	80	160	120	88	320	80	25	400	350	400	23	140	340	180	27	105	490	2 x PG 29